

# Seat ventilation blower

## DRF-26106 Standard




**Size 100 x 100 x 21 mm**


Motor Specification

|                             |       |                                                    |
|-----------------------------|-------|----------------------------------------------------|
| Type of motor               | -     | DC Brushless                                       |
| Weight                      | g     | 117                                                |
| Size                        | mm    | 100 x 100                                          |
| Thickness at housing scroll | mm    | 21                                                 |
| Motor output                | W     | 2.6                                                |
| Maximum current             | A     | 0.9                                                |
| Operating voltage range     | V     | 9 to 16                                            |
| Operating temperature       | °C    | -40 to 80                                          |
| Storage temperature         | °C    | -40 to 85                                          |
| Operating relative humidity | %     | 95                                                 |
| Maximum pressure            | Pa    | 450                                                |
| Maximum flow                | CFM   | 24                                                 |
| Speed                       | RPM   | 4,460                                              |
| Noise                       | dB(A) | 55                                                 |
| Bearing type                | -     | Ball                                               |
| IP rating                   | -     | IP52                                               |
| Housing material            | -     | Plastic                                            |
| Impeller material           | -     | Plastic                                            |
| Interface                   | -     | Power, Ground,<br>Speed control<br>(PWM or Analog) |



P-Q Performance Curve

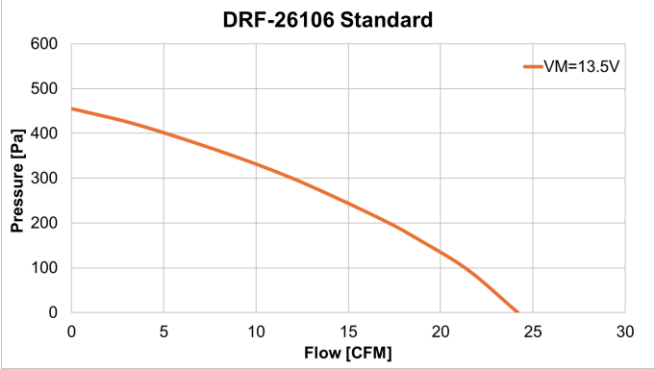

Noise Performance Curve

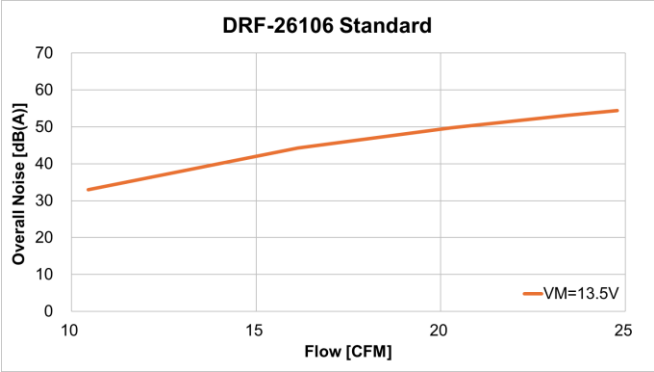

Dimension

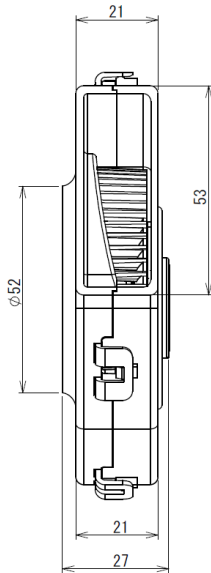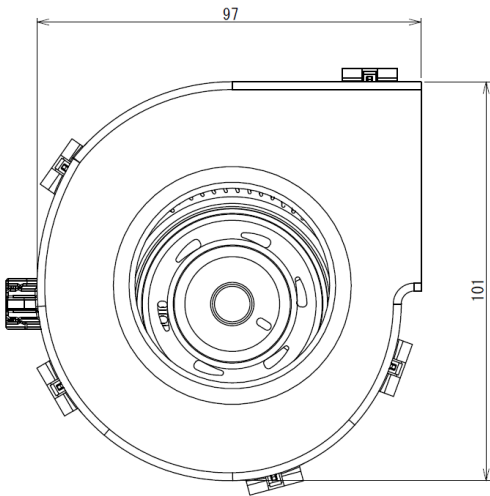

■ Japan (Headquarters)

**Shinano Kenshi Co., Ltd.**

1078, Kami-maruko, Ueda City, Nagano 386-0498  
Japan  
jp.aspina-group.com

■ USA

**ASPINA Inc.**

18952 MacArthur Boulevard, Suite 230, Irvine, California 92612  
U.S.A.  
us.aspina-group.com

■ Europe

**ASPINA GmbH**

Kölner Str. 12, 65760 Eschborn  
Germany  
eu.aspina-group.com