

# Seat ventilation blower

## DRF-29A306 XL Dual




**Size 128 x 127 x 22 mm**

# DRF-29A306 XL Dual


## Motor Specification

|                             |       |                                                    |
|-----------------------------|-------|----------------------------------------------------|
| Type of motor               | -     | DC Brushless                                       |
| Weight                      | g     | 170                                                |
| Size                        | mm    | 128 x 127                                          |
| Thickness at housing scroll | mm    | 22                                                 |
| Motor output                | W     | 4.9                                                |
| Maximum current             | A     | 0.7                                                |
| Operating voltage range     | V     | 9 to 16                                            |
| Operating temperature       | °C    | -40 to 80                                          |
| Storage temperature         | °C    | -40 to 85                                          |
| Operating relative humidity | %     | 95                                                 |
| Maximum pressure            | Pa    | 222                                                |
| Maximum flow                | CFM   | 31                                                 |
| Speed                       | RPM   | 2,810                                              |
| Noise                       | dB(A) | 49                                                 |
| Bearing type                | -     | Sleeve                                             |
| IP rating                   | -     | IP52                                               |
| Housing material            | -     | Plastic                                            |
| Impeller material           | -     | Plastic                                            |
| Interface                   | -     | Power, Ground,<br>Speed control<br>(PWM or Analog) |


## P-Q Performance Curve

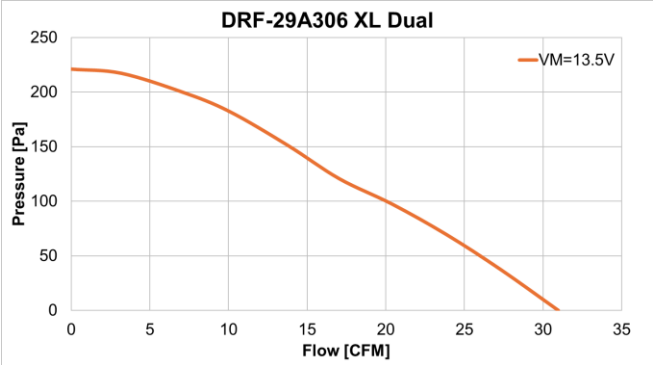

## Noise Performance Curve

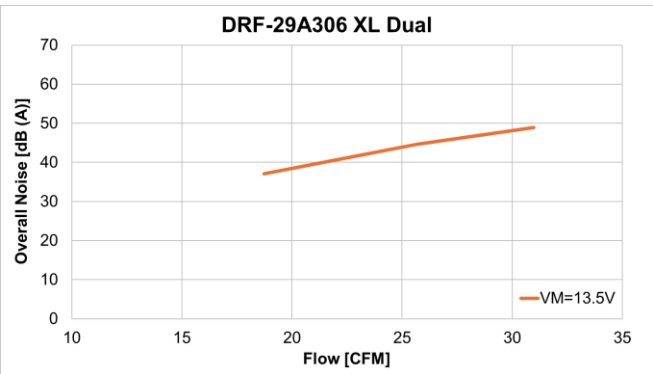

## Dimension

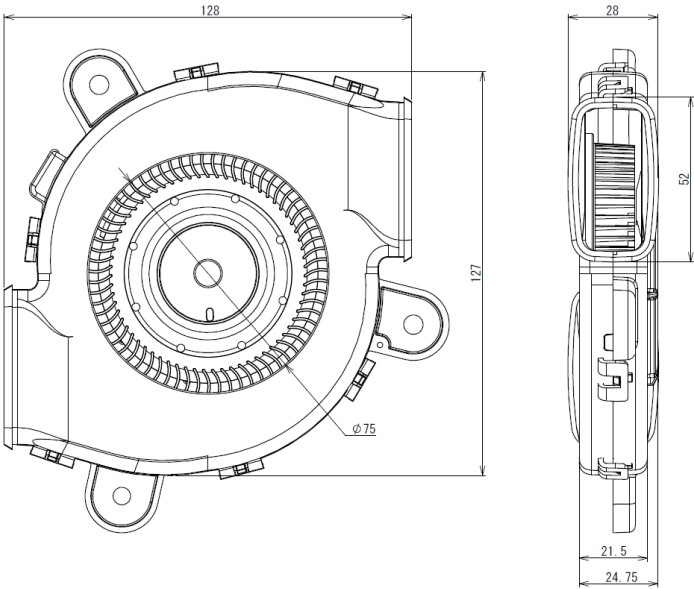

### ■ Japan (Headquarters)

### Shinano Kenshi Co., Ltd.

1078, Kami-maruko, Ueda City, Nagano 386-0498  
Japan  
jp.aspina-group.com

### ■ USA

### ASPINA Inc.

18952 MacArthur Boulevard, Suite 230, Irvine, California 92612  
U.S.A.  
us.aspina-group.com

### ■ Europe

### ASPINA GmbH

Kölner Str. 12, 65760 Eschborn  
Germany  
eu.aspina-group.com